


# Sierra Series



Scan to view all *Sierra Series* lubricants

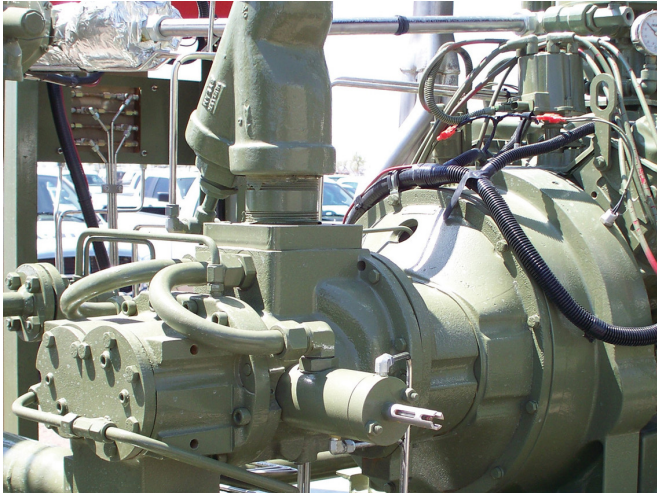

## Product Benefits

An air compressor is only as good as the quality of its lubricant. That's why Summit Lubrication created the Sierra® Series: synthetic hydrocarbon lubricants formulated to provide extended service to rotary screw air compressors operating under typical conditions. Produced from the highest grade additives and base stocks available, Summit Sierra® lubricants:

- Are proven to provide an 8,000 hour service life in rotary screw air compressor applications
- Offer superior protection from wear and deposit formation
- Are based on lubrication technology superior to other synthetic hydrocarbons – backed by millions of hours of proven performance

The result? Increased equipment life that saves you thousands in operational costs.

## Physical Properties

Find the right Sierra® Series product for your compressor.

Products	Summit Sierra-32	Summit Sierra-46	Summit Sierra-68
ISO Grade	32	46	68
Viscosity @ 40°C	33.8cst	46.4cst	67.5cst
Viscosity @ 100°C	6.12cst	7.48cst	9.70cst
Viscosity Index	130	126	124
Specific Gravity	0.8671	0.8717	0.8747
Density (lbs/gal) @ 60°F	7.23	7.26	7.29
Pour Point, °F (°C)	-60 (-51)	-54 (-48)	-49 (-45)
Flash Point, °F (°C)	455 (235)	475 (246)	510 (266)
Fire Point, °F (°C)	475 (246)	505 (263)	540 (280)
Water Separation	40-40-0 (10 min)	40-40-0 (10 min)	40-40-0 (15 min)

## Why Summit Lubrication?

For over four decades, Summit has been recognized as an industry leader not only in synthetic lubricant technology, but also in the air compressor business.

In everything we do, we are looking to answer the question, “Does this add to our customers’ success?”

**Contact your Summit distributor to upgrade your air compressor lubricant and start saving time, energy and money today.**